WAVES. WORLD. WIDE. OURPASSION OURSOLUTIONS OURPLAYGROUND



单8路有源分路器 - GTA2300.8 VHF/UHF (20-3000 MHz)



Image for reference only

TECHNICAL DATA ...

| Type No. | 1300139 |
|-------------------|----------------------------|
| Number of inputs | 1 |
| Number of outputs | 8 |
| Frequency range | 20 – 3000 MHz |
| Gain [dB] | 1 ± 1 |
| Flatness [dB] | +/- 1.0 typ., +/- 1.5 max. |
| Noise Figure [dB] | 6.0 typ., 8.0 max. |
| OPIP3 [dBm] | +15 min., +18 typ. |
| OPIP2 [dBm] | +30 min., +32 typ. |
| Isolation [dB] | |
| Out/out | 15dB min., 18dB typ. |
| Out/in | 28dB min., 32dB typ. |
| VSWR | |
| Input | 1.6:1 typ., 1.8:1 max. |
| Output | 1.6:1 typ., 1.8:1 max. |
| Input power [dBm] | |
| @ 1dB compression | +5 min. |
| Non-destructive | +33 max. (CW) |
| Impedance [Ω] | 50 |
| Connectors | |
| Input | N female |
| Output | N female |

| Power supply | 80-264 V AC (47-63 Hz) |
|------------------------|------------------------|
| Power consumption | <10VA |
| Temperature range | Indoor use only |
| Operating | -10 +50°C |
| Storage | -20 +60°C |
| Colour: | Front panel: RAL7021 |
| Attached hardware | Power cord |
| | Operating manual |
| Dimensions (wxhxd) | 483mm x 44mm x 360mm |
| | (19" drawer, 1U) |
| Weight | 4.5 kg |
| Features | |
| Redundant power supply | |

Limiter at input

Note: Unused outputs have to be terminated using a 50Ω load in order to comply with the specifications

OPTIONS

The following options are available:

- Single power supply
- DC power supply

- Mixed power supply (AC and DC)
- Amplifier monitoring





.




• • •



DESCRIPTION

The fundamental application of a receiver (RX) multicoupler is to enable multiple radio receivers, spectrum analyzers or scanners, to share a common signal source like antennas, signal generators or reference clocks. Any incoming signal will be distributed without loss.

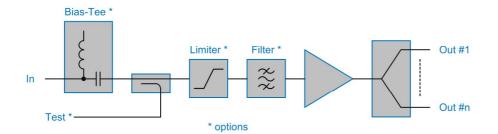

APPLICATIONS

The GTA2300.8 is able to process extremely broad band signals. The frequency range starts at 20MHz (VLF) and extends to 3000MHz (UHF). The advantage of using the GTA2300.8 in signal monitoring applications (SIGINT or COMINT) is in the port-to-port isolation. It reduces the possibility of RF interaction between receivers caused by local oscillators or synthesizers.

ABOUT US

novotronik is a Germany-based electronics engineering company. **novotronik** specialises in meeting the needs of government and defence, telecommunication, broadcast and aerospace. We have about 25 years experience producing state of the art technology for your applications.

OUR SKILLS

novotronik develops and manufactures technically sophisticated products. As a **certified aerospace and defence company novotronik** operates a quality management system in accordance with ISO 9001:2015 and EN 9100:2018 (equivalent to AS 9100D and JISQ 9100:2016 including ISO 9001:2015).





您需要详细信息?请现在通过sales@hkaco.com联系我们。 免费电话: 400-999-3848 您身边的测试测量专家:北京 | 上海 | 深圳 | 西安 | 广州 | 成都 | 武汉 | 香港 | 台湾 | 美国