


# REVOLUTION PI

## RevPi AIO

Article No.: 100250

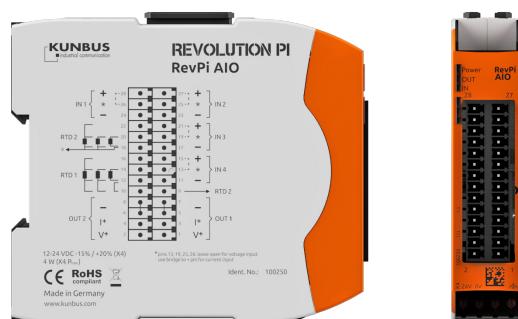

## Technical Data

Compliance	EN61131-2
Housing dimensions (H x W x D)	96 x 22.5 x 110.5 mm
Housing type	DIN rail housing (for DIN rail version EN 50022)
Housing material	Polycarbonate
Weight	approx. 115 g
IP Code	IP20
Power supply	12 - 24 V (-15%/+20%)
Current consumption	max. 200 mA at 24V (full load) max. 400 mA at 12V (full load) max. 500 mA during start up
Operating temperature	-30...+55 °C
Storage temperature	-40...+85 °C
Humidity (at 40 °C)	93 % (non-condensing)
Voltage measuring range	±10 V   ±5 V   0...10 V   0...5 V
Current measuring range	0...20 mA   0...24 mA   4...20 mA   ±25 mA
Temperature measuring range	-200...+850 °C
Voltage output range	±10 V   ±11 V   ±5 V   ±5.5 V   0...10 V   0...11 V   0...5 V   0...5.5 V
Current output range	0...20 mA   0...24 mA   4...20 mA
Number of input channels for voltage for current for RTD (Pt100/Pt1000)	6 max. 4 max. 4 2
Number of output channels for voltage for current	2 max. 2 max. 2
Galvanic isolation Input to Input Input to Output Output to Output System bus to inputs/outputs	No Yes No Yes
Input type Voltage/current RTD	differential 2-, 3-, 4-wire
Output type	single ended, common ground, short-circuit proof
ADC type	24 bit ΔΣ
DAC type	16 bit

# REVOLUTION PI

## RevPi AIO

Article No.: 100250

## Technical Data

<b>Input resolution in process image</b> Voltage Current Temperature	1 mV (16 bit) 1 µA (16 bit) 0.1 K (16 bit)
<b>Output resolution in process image</b> Voltage Current	1 mV (16 bit) 1 µA (16 bit)
<b>Max. overall input error (at 25 °C ambient temperature)</b> Voltage (for all ranges) Current (for all ranges) Temperature (for complete range)	±10 mV (±5 mV @ 0...5 V range) ±20 µA (±24 µA @ 0...24 µA range) ±0.5 K
<b>Max. overall input error (for -30...+55 °C ambient temperature)</b> Voltage (for all ranges) Current (for all ranges) Temperature (for complete range)	±10 mV ±72 µA ±1.5 K
<b>Max. overall output error (at 25 °C ambient temperature)</b> Voltage (for all ranges) Current (for all ranges)	±15 mV ±20 µA
<b>Max. overall output error (for -30...+55 °C ambient temperature)</b> Voltage (for all ranges) Current (for all ranges)	±15 mV ±72 µA
<b>Input conversion time</b> (data rate in process image)	8...1000 ms (adjustable)
<b>Output data rate</b>	1 PiBridge cycle
<b>Output slew rate</b> Adjustable digital slew rate control	1 LSB@3.3 kHz up to 128 LSB@258 kHz
<b>Input impedance</b> Voltage Current	>900 kΩ <250 Ω
<b>Output impedance</b> Voltage Max. capacitive load	<16 Ω 5 nF @ 1 kΩ
<b>Max. load resistance for current output</b>	600 Ω
<b>Min. load resistance for voltage output</b>	1 kΩ
<b>Further features</b>	All inputs and outputs are linear scalable Overtemperature monitoring Overcurrent monitoring Range monitoring
<b>Optical indicator</b>	3 status LEDs (bi-color)



需要详细信息? 请通过[sales@hkaco.com](mailto:sales@hkaco.com)联系我们 | 电话: 400-999-3848

您身边的自动化专家: 广州 | 北京 | 上海 | 深圳 | 西安 | 武汉 | 成都 | 香港 | 台湾 | 美国



关注我们